

V10 COUPLING LINKS SERIES

For safe and reliable sling assemblies, V10 Coupling Links are essential. Whether assembling mechanical slings or attaching eye type fittings, these quenched, tempered, and proof-tested couplers will give you peace of mind. Exceeds OSHA, Government, NACM, and ASTM specs and comes in a blue powder coat finish.



FEATURES

- Grade 100
- Made from premium fine grain alloy steel
- Made in Italy
- Quenched and tempered before proof testing
- Blue powder coat finish
- Meets or exceeds OSHA, Government, NACM, and ASTM specs
- Suitable for connecting hooks, chain and other lifting components

V10 COUPLING LINKS SERIES

GRADE

- 100

FINISH

- Blue Powder Coat Finish

STANDARDS

- Meets or exceeds OSHA, Government, NACM, and ASTM specs

ATTACHMENT

- Link

HEAT TREATMENT

- Quenched and tempered before proof testing

ORIGIN

- Made in Italy

LINK TYPE

- Coupling Link

APPLICATION

- Overhead Lifting

MATERIAL

- Premium Fine Grain Alloy Steel



[WWW.KITO.CA](http://www.kito.ca) | 1.888.322.KITO (5486)


All specifications, dimensions and drawings are available at www.kito.ca, or call our Customer Service staff for friendly and expert advice on models and options.

2

V10 ALLOY CHAIN
ACCESSORIES

V10 COUPLING LINKS SERIES

DIAGRAM DRAWINGS

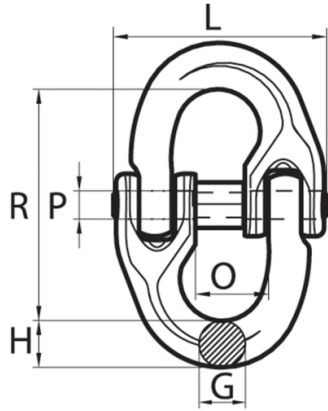

V10 COUPLING LINKS SERIES

PRODUCTS SPECIFICATIONS

Product	Manufacturer Part No.	Trade Size (Inches)	Trade Size mm	Dim G	Dim H	Dim O	Dim P x L	Dim R	Lbs. Per Ea.	Working Load Limit (Lbs.)
8952900	CLX06	7/32	6	0.299	0.307	0.551	0.19 X 1.54	1.732	0.15	2700.0
8953000	CLX08	5/16	8	0.394	0.453	0.709	0.25 X 2.09	2.421	0.42	5700
8953100	CLX07	9/32	7	0.354	0.3694	0.669	0.24 X 1.85	2.008	0.26	4300
8953210	CLX10	3/8	10	0.496	0.543	0.886	0.32 X 2.48	2.835	0.84	8800
8953300	CLX13	1/2	13	0.657	0.748	1.083	0.39 X 3.11	3.465	1.61	15000
8953400	CLX16	5/8	16	0.827	0.827	1.299	0.55 X 4.17	4.055	3.15	22600
8953510	CLX20	3/4	20	0.925	1.161	1.634	0.63 X 4.96	4.528	5.86	35300
8953610	CLX22	7/8	22	1.063	1.142	1.909	0.63 X 5.75	5.315	8.29	42700